



MAXHUB UC P15

Full HD PTZ Camera with Clear Video Imagery for Medium to Large Meeting Room

Smooth Full HD Video with 60 fps maximum frame rate

Experience life-like video even in challenging meeting room illumination

Supports multiple camera control methods (IR Remote/Serial/IP/USB)

Plug-n-play simplicity; works with common UC applications

EXCEPTIONALLY SMOOTH & CRYSTAL-CLEAR VIDEO





Full-HD video at 60 fps for studio-quality experience




Lifelike and natural images even in dimly lit meeting rooms.

USE CASE



Large meeting room

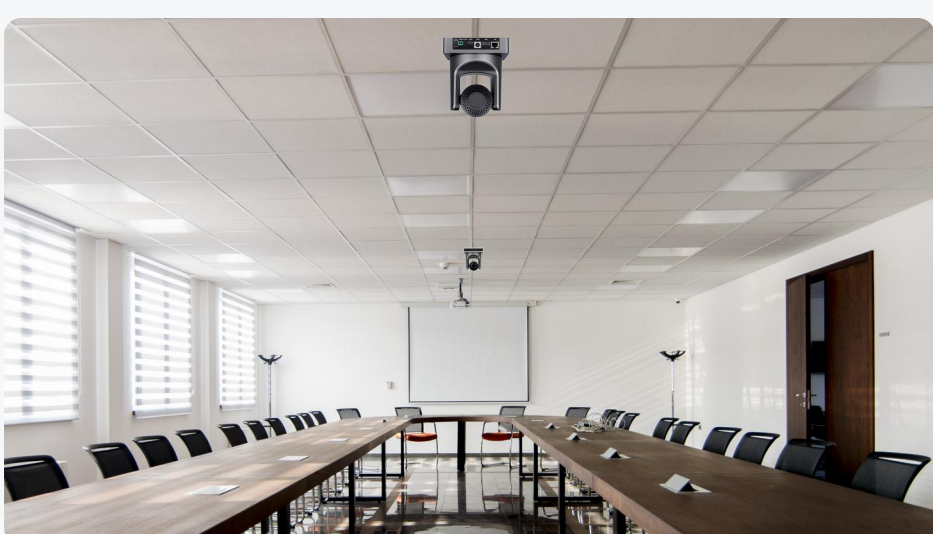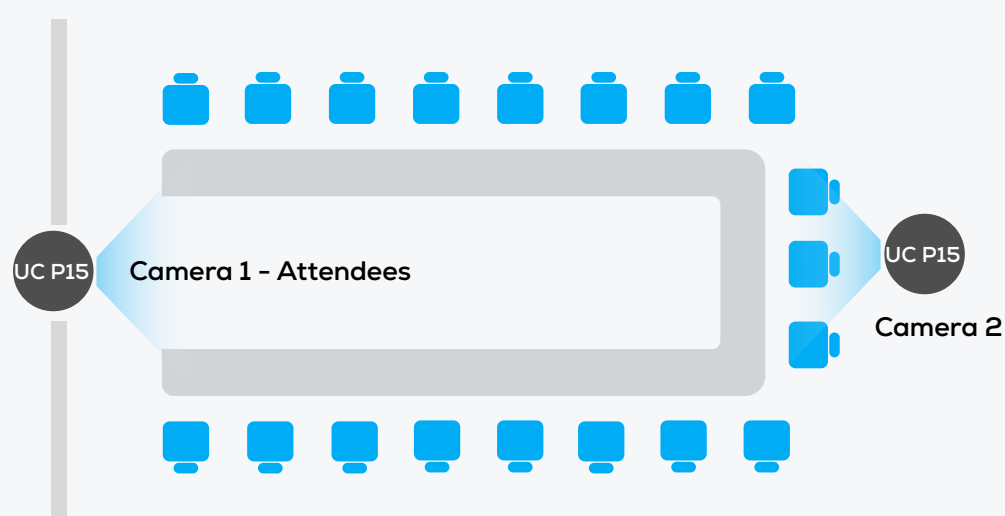

Teaching and learning

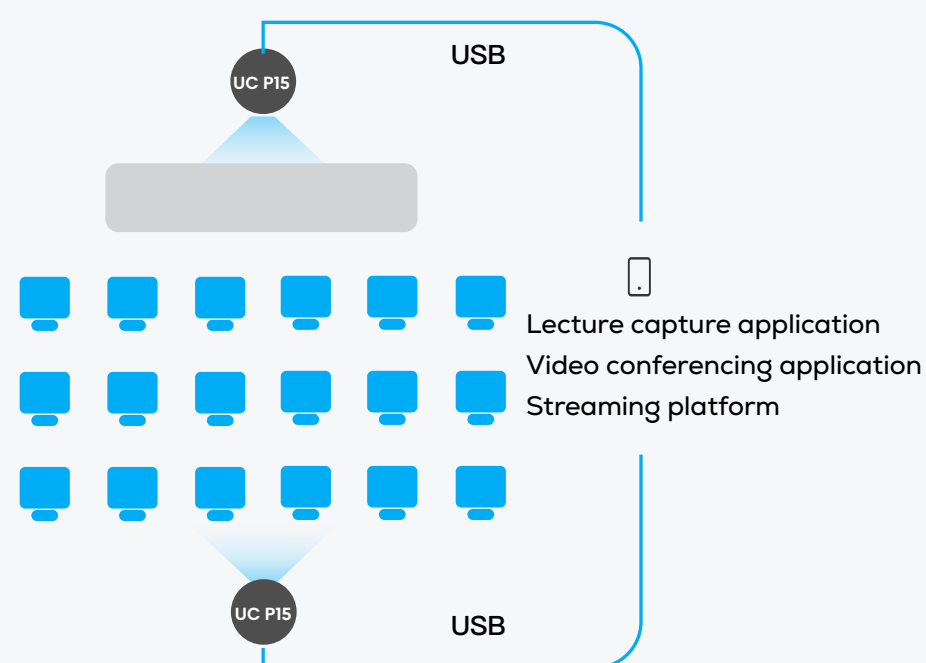

Small studio streaming

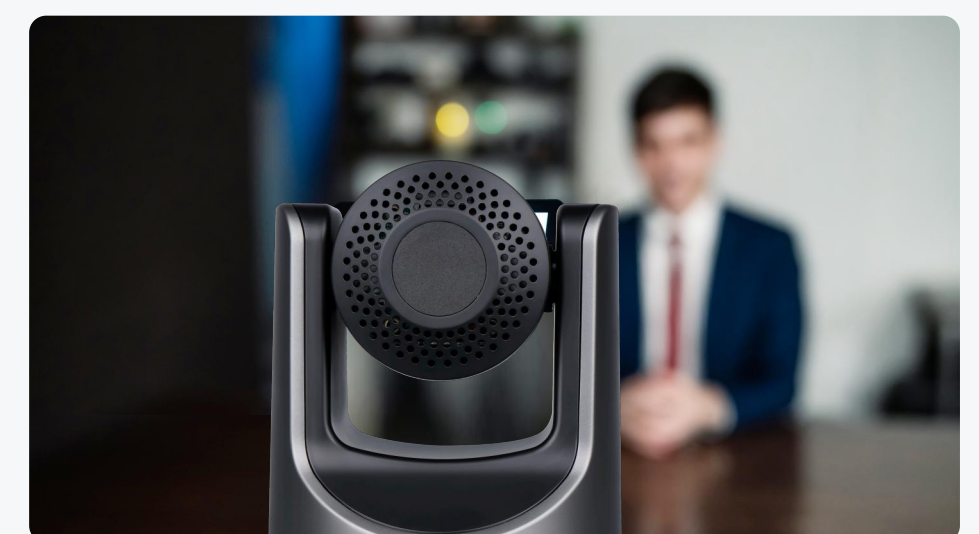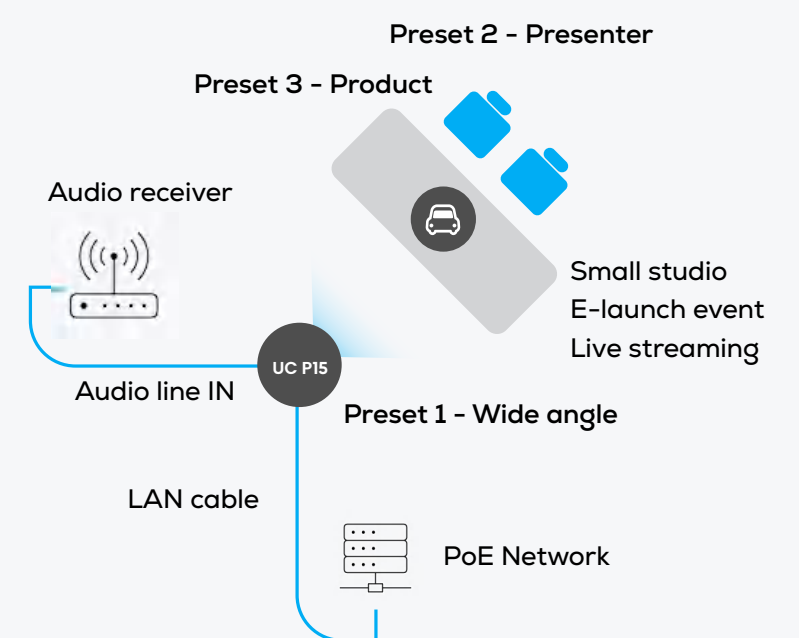



SUPPORTS POPULAR VIDEO CONFERENCING PLATFORMS

Works with what you have. The UC P15 is compatible with Zoom, Microsoft Teams, RingCentral, Cisco Webex, Google Meet, and other popular platforms.



SCALABLE FROM MEDIUM TO LARGE- ROOM APPLICATIONS

The bundled solution with UC BM35 allows for deployment and collaboration in a wide range of large spaces.

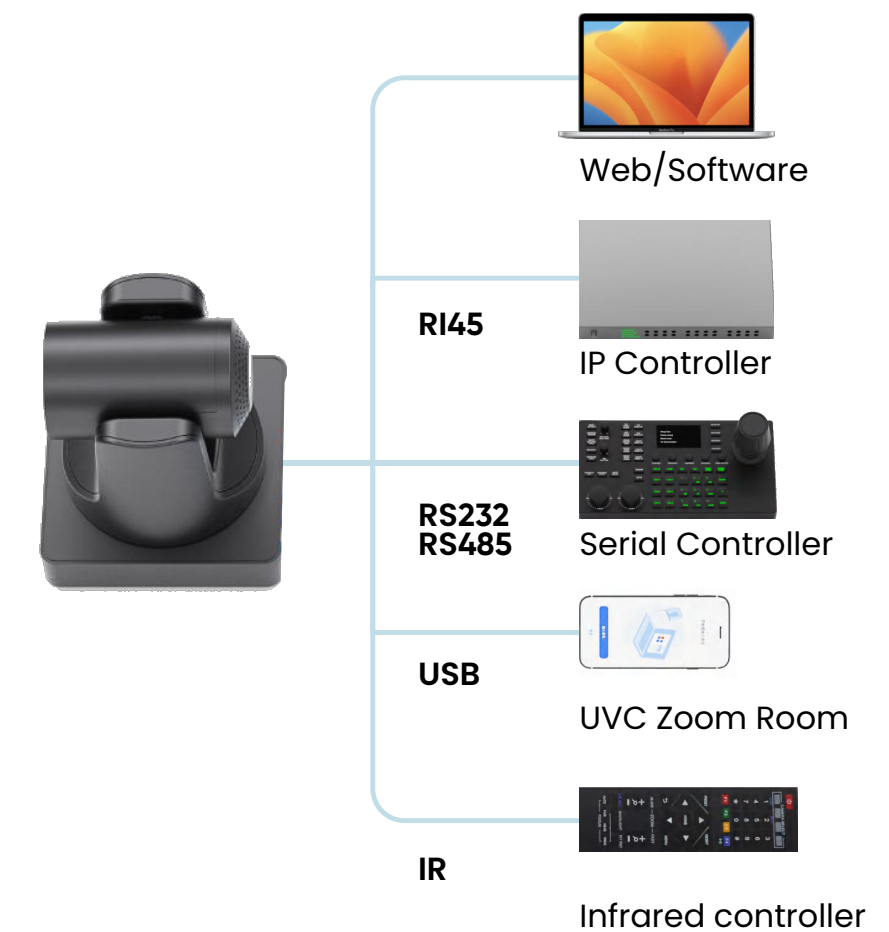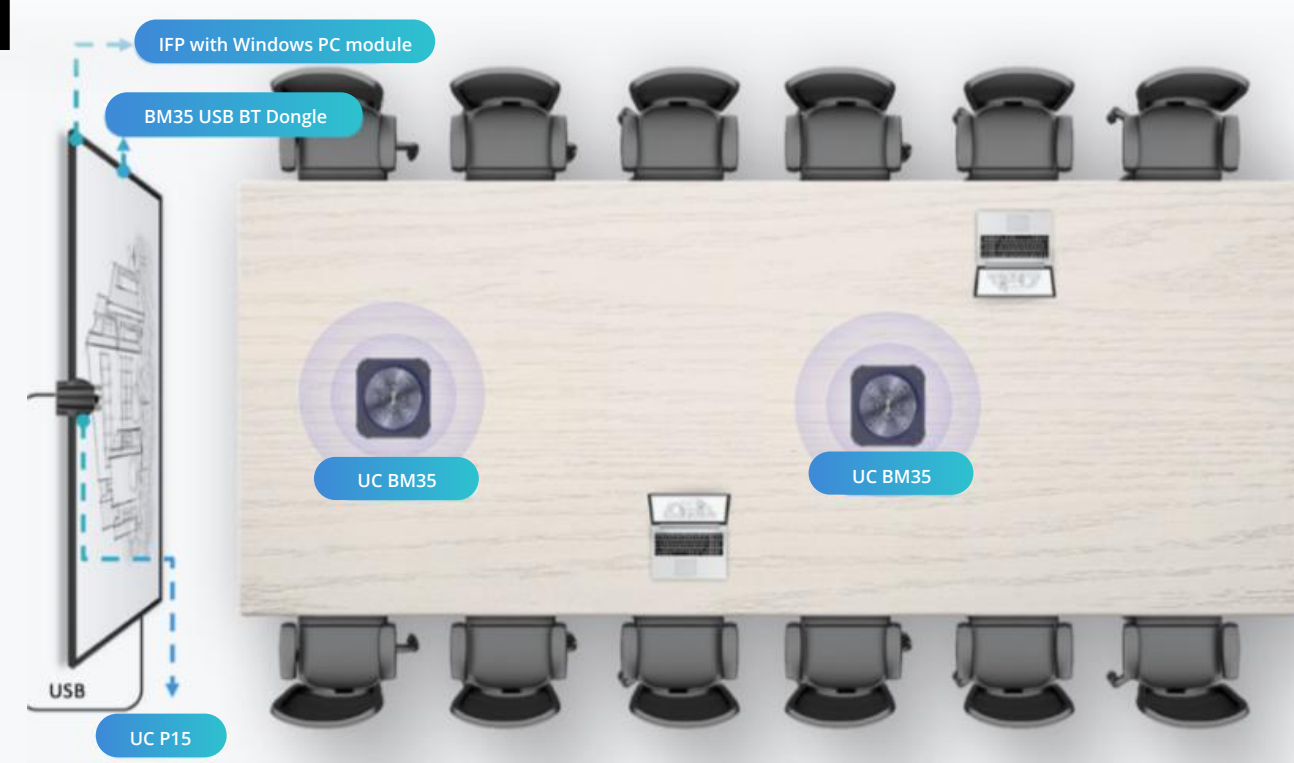

Full HD 12x Zoom PTZ Camera (UC P15)

Zoom	12x Optical Zoom, 16x Digital Zoom (Total 196x)
Resolution	Full HD 1080P
DFOV	85.2°

Dual Daisy Chain Speakerphone (UC BM35)

Voice Pickup	Up to 12m
Microphones	16-mic array combined
Daisy chain	BT wireless cascading

MULTIPLE CONTROL OPTIONS

Tailor the camera operation based on the environment with multiple control options including web interface, software & USB, IP network, serial control, and infrared remote control

Specification

Camera

- Full HD 1/2.8", CMOS, 2.07M Pixel
- Video System: 1080P60, 1080P50, 1080P30, 1080P25, 720P60, 720P50
- Progressive Scanning
- 12x Optical Zoom
- 192x Total Zoom (16x Digital)
- Lens: f3.5mm ~ 42.3mm, F1.8 ~ F2.8
- Min. Illumination: 0.5Lux @ (F1.8, AGC ON)
- Shutter: 1/30s ~ 1/10000s
- White Balance: Auto, Indoor, Outdoor, One Push, Manual, VAR
- Backlight Compensation
- 2D&3D Digital Noise Reduction
- Video S/N: ≥55dB
- Horizontal Angle of View :72.5°~ 6.9°
- Vertical Angle of View: 44.8°~ 3.9°
- Diagonal Angle of View: 85.2°
- Pan: ±170°
- Tilt: -30° (down) +90° (up)
- Pan Speed Range: 2.7° ~ 35.7°/s
- Tilt Speed Range: 2.7° ~ 31.5°/s
- Horizontal & Vertical Flip
- Support Image Freeze
- Number of Preset: up to 255
- Preset Accuracy: 0.1°

USB Features

- Operating System: Windows 7, Windows 8, Windows 10, Mac OS X, Linux, Android
- Video Format: YUY2, MJPEG, H.264
- Resolution: Max 1080P@60fps
- Type-C USB 3.1 Gen 1, backward compatible with USB 2.0
- UVC 1.1~1.5
- UAC 1.0

Physical Specifications

- Camera Dimension L×H×D : 144 x 144 x 167.9 (mm)
- Net Weight:1.41Kg
- Package Dimension L×H×D: 230 x 230 x 250 (mm)
- Gross Weight: 2.5Kg

Compatible Applications

Support Major VC Software including ZOOM, Microsoft® Teams, Google Meet, Google Hangouts, Cisco WebEx®, RingCentral, etc.,

Network Features

- Video Compression:H.264/MJPEG
- Dual Video Stream
- Main Stream Resolution: 1920x1080, 1280x720, 1024x576,960x540,640x480,640x360
- Sub Stream Resolution: 1280x720, 1024x576, 720x480,720x408,640x360,320x240, 320x180
- Video Bit Rate: 32Kbps ~ 102400Kbps
- Bit Rate Type: Variable Rate, Fixed Rate
- Frame Rate: 50Hz: 1~ 50fps, 60Hz: 1~ 60fps
- Audio Compression: AAC
- Audio Bit Rate: 96Kbps, 128Kbps, 256Kbps
- Support protocols: TCP/IP, HTTP, RTSP, RTMP, ONVIF, DHCP, Multicast, etc.

Power

- Simultaneous power input: Power jack DC 12V/ USB DC 5V/ PoE (802.3af)
- Current Consumption: 12V 1.0A (Max) / 5V 1.5A (Max)
- Power Consumption: 12W (Max)

Input/ Output Port

- USB 3.1 Type-C
- HDMI 1.4b
- RJ45, 10/100Mbps Ethernet
- 3.5mm Jack, Line In
- RS232, 8pin mini DIN
- RS485, 2-core Phoenix Port
- Power Jack, EITA type DC IN 12V

Package Contents

- UC P15 Camera
- Lens Cover
- USB 3.0 Cable
- Power Adaptor
- Remote Control
- Wall-mount bracket
- Mounting Screw Set
- User Manual

Warranty

- Camera 3 Years Hot Swap
- Accessories 1 Year