

EPOS IMPACT 760T Dubbele koptelefoon, USB-C, MS Teams

Merk : EPOS

Productfamilie: EPOS

Artikelcode: 1001214

Productnaam : IMPACT 760T
Dubbele koptelefoon, USB-C, MS
Teams

- Toonaangevende spraakopname voor natuurlijk klinkende gesprekken
- Zit de hele dag prettig
- Ergonomische inline controller voor moeiteloze gesprekken
- Gebouwd voor laserscherpe focus in drukke werkomgevingen

EPOS IMPACT 760T

EPOS IMPACT 760T Dubbele koptelefoon, USB-C, MS Teams. Type product: Headset.

Connectiviteitstechnologie: Bedraad. Aanbevolen gebruik: Oproepen/muziek. Frequentiebereik koptelefoon: 20 - 20000 Hz. Snoerlengte: 1,8 m. Gewicht: 145 g. Kleur van het product: Zwart




Prestatie		Microfoon	
Type product *	Headset	MEMS (Micro-Electro-Mechanical System) microfoon	✓
Draagwijze *	Hoofdband	Microfoon mute	✓
Aanbevolen gebruik *	Oproepen/muziek		
Headset type	Stereofonisch		
Kleur van het product *	Zwart		
Bedieningstoetsen	Oproep beantwoorden/beëindigen, Dempen		
Volumeregeling	Draaiknop		
Type regeleenheid	Lijnbesturingseenheid		
Snoerlengte	1,8 m		
Kleur kabel	Zwart		
LED-indicatoren	✓		
BeamForming	✓		
Geoptimaliseerd voor	UC, MS Teams		
Helder geluid	✓		
Certificering	Microsoft Teams		
Poorten & interfaces		Gewicht en omvang	
Connectiviteitstechnologie *	Bedraad	Breedte	198 mm
USB-aansluiting	✓	Diepte	64 mm
USB-connector	USB Type-C	Hoogte	159 mm
		Gewicht	145 g
		Oorkussen afmetingen (BxDxH)	18 x 68 x 18 mm
Hoofdtelefoon		Verpakking	
Positie speakers koptelefoon *	Circumaural	Breedte verpakking	72 mm
Akoestisch systeem	Gesloten	Diepte verpakking	208 mm
Frequentiebereik koptelefoon	20 - 20000 Hz	Hoogte verpakking	201 mm
		Gewicht verpakking	330 g
		Inhoud van de verpakking	
		Snelstartgids	✓
		Veiligheidsblad	✓
		Opbergetui	✓
		Logistieke gegevens	
		(Buitenste) hoofdverpakking breedte	230 mm
		(Buitenste) hoofdverpakking lengte	425 mm
		(Buitenste) hoofdverpakking hoogte	389 mm

Hoofdtelefoon		Logistieke gegevens	
Driver type	Dynamisch	Hoeveelheid per (buitenste) hoofdverpakking	12 stuk(s)
Ruisonderdrukking	✗	Technische details	
Totale harmonische vervorming (THD)	0,5 procent	Garantieperiode	3 jaar
Microfoon		Overige specificaties	
Microfoontype *	Boom	Interface adapters meegeleverd	USB Type-A male - USB Type-C female
Frequentie microfoon	100 - 16000 Hz		
Klapbare microfoon	✓		



5714708010197

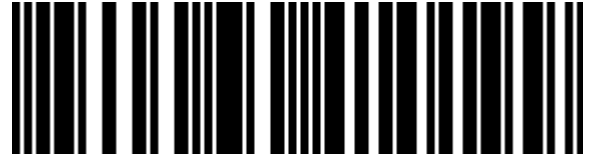

0840064410199



840064410199

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 14-APR-2025. Prints or copies of Information are only valid on the printed Publication date